

PSE (C-R Capacitors Spark Quench)

Features


- These Units are newly being used for prevention and absorption of Click noise in switch, plug of electric sources, protection of interference in circuit, and so forth.

Characteristics

- Voltage proof:
T-C1, 500 VAC 3 sec
T-T/1200 VAC 60 sec
- Insulation resistance: $\geq 9000 \text{ M}\Omega$

Safety Certificate Approved

- E 99353-UL

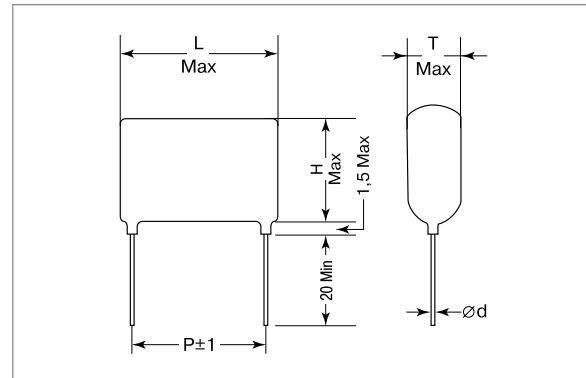

Dimensions

Capacitance (μf)	AC250V / AC300V				
	(μF) + (Ω)	L	H	T	P
0.01 + 120	17	14	5	14	0.5
0.033 + 120	22	16	7	16	0.7
0.1 + 120	24	16	8	19	0.7
0.1 + 33	24	16	8	19	0.7

*Not yet Approved Safety Certificate