


## Ceramic Resonator ZTAC/ZTTC SMD Series




### Dimensions (mm)


ZTAC, ZTTC

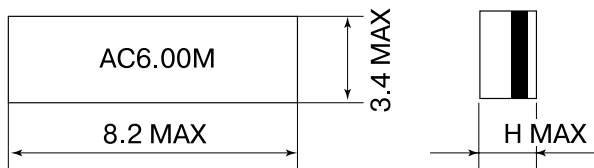

ZTAC



ZTTC

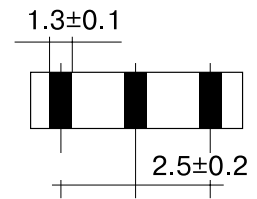

Frequency Range	H
2.00 ~ 3.50MHz	2.3
3.51 ~ 6.00MHz	2.0

### Principal Parameters

Model	Frequency Range MHz	Frequency Accuracy (25°C)	Temperature Stability (-20°C~+80°C)	Operating Temperature	Age (Ten Years)
ZTAC MG	2.00 ~ 6.00	±0.5%	±0.5%	-20°C~+80°C	±0.3%
ZTTC MG	2.00 ~ 6.00				±0.3%