

## BSE (C-R Capacitors Spark Quench)

### Features

- These Units are newly being used for prevention and absorption of Click noise in switch, plug of electric sources, protection of interference in circuit, and so forth.

### Characteristics


- Voltage proof:  
1,500, AC, 3 sec./T-C  
1,250, AC, 60 sec./T-T
- Insulation resistance:  $\geq 9000 \text{ M}\Omega$

### Safety Certificate Approved

- E 99353-UL
- VDE□□□

### Explanation of Part Number:

BSE 104 R 120

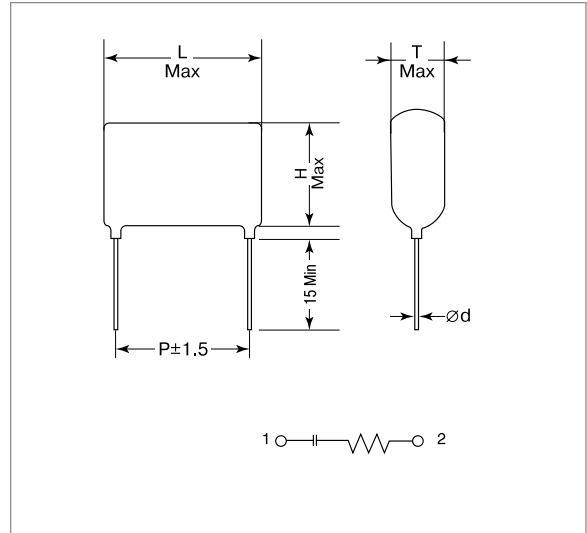

(mm)

Capacitance ( $\mu\text{f}$ )	AC250V / AC300V				
	L	H	T	P	d( $\emptyset$ )
0.033 + 120	20	16	8	16.5	0.7
0.1 + 120	26	17	9	21.5	0.7